

# signature

## Sliding Windows



Elegantly simple, classic design...


# signature Sliding Windows

## Performance Parameters

### Features and Benefits

- Wider glazing pockets for superior acoustic and thermal performance
- Stacking configuration available for servery situations
- Euro track roller system ensures smooth sliding action
- Handle has mortice lock for superior security

Frame sizes	67mm / 100mm
Maximum window height	2000mm
Maximum window width	5400mm
Maximum panel width	1350mm
Maximum panel weight	100kgs
Maximum water rating	600Pa
Maximum wind rating	6000Pa ULS
Maximum glass thickness	12.76mm (single glazed) 20mm (IGUs)
Maximum acoustic rating	Rw33
Maximum bushfire attack level	BAL 40

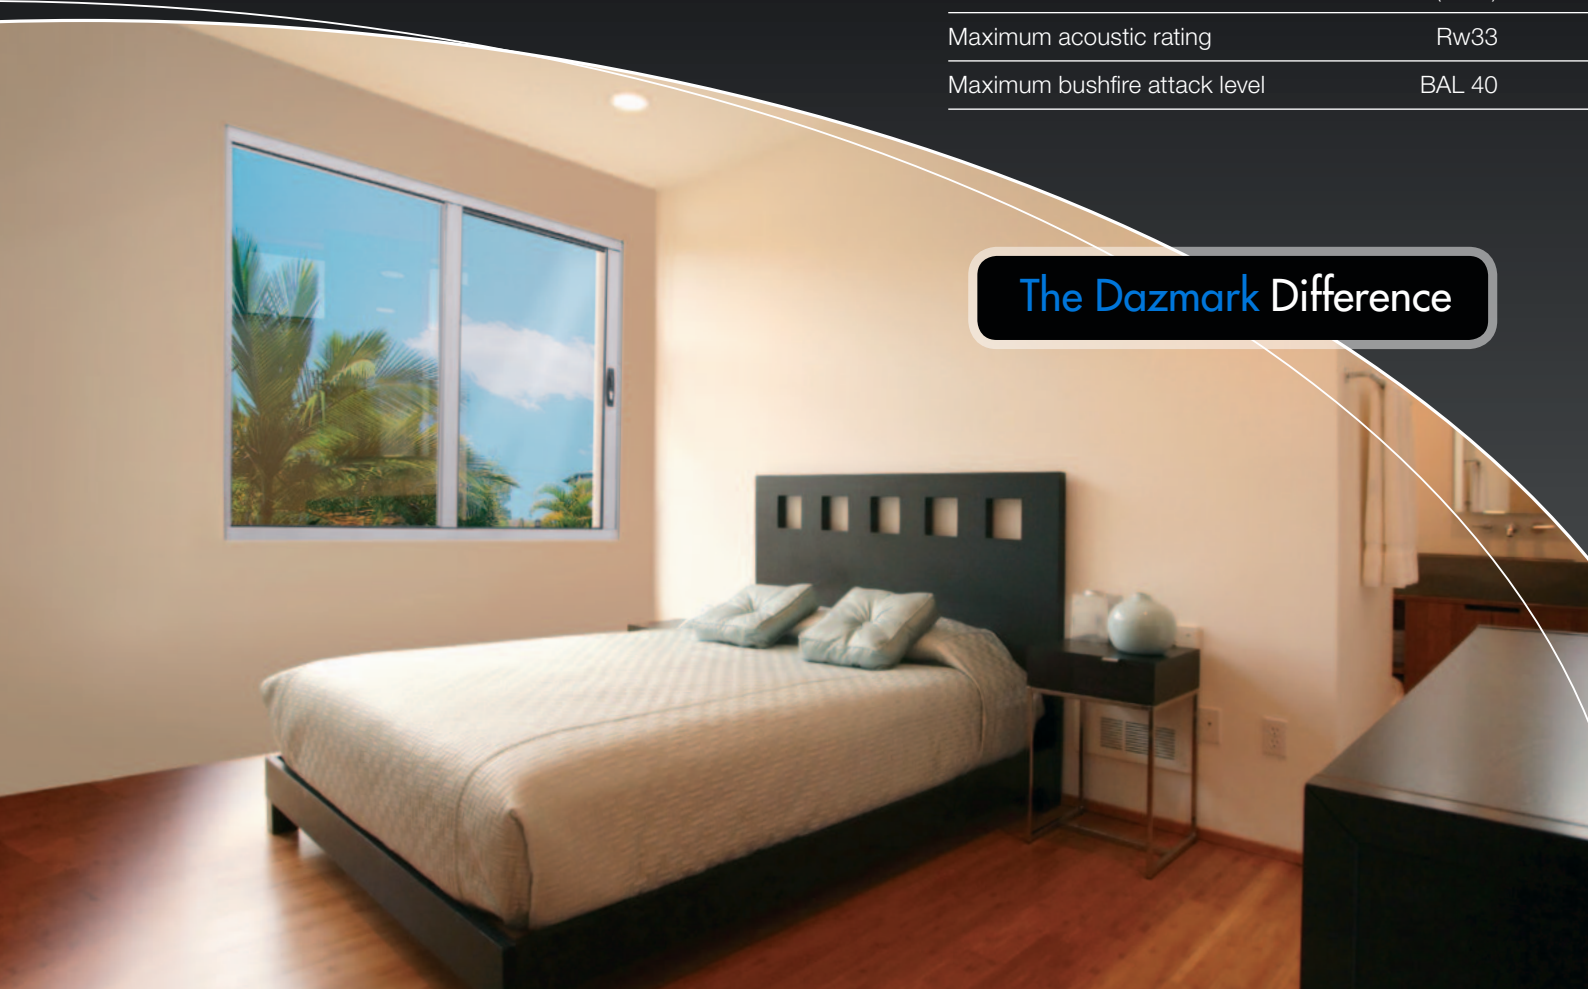

The Dazmark Difference

windows | doors | insect & safety screens | double glazing



**Australian**  
Owned & Made

Dazmark's products are proudly made in Australia and designed specifically to meet all Australian conditions

**Note:** Products may be subject to local variation, regulatory requirements and confirmation of structural performance



For more information call Dazmark's on  
**(03) 9364 1122**  
or visit [dazmark.com.au](http://dazmark.com.au)